


Self Priming Centrifugal Non Clog Pump

MSPB Series - 3000 RPM (Mud Pump)

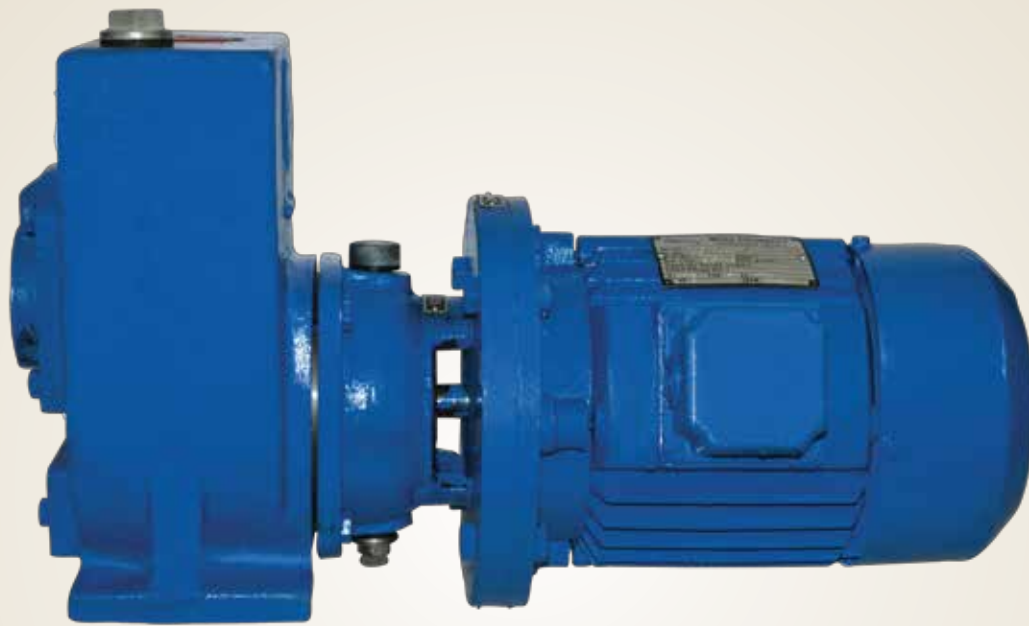

Range :

Capacity	: Upto 75 M3/Hr
Head	: Upto 35 Mtr.
Max. Liquid Temp.	: Upto 80 °C.
Suction Lift	: Upto 7 Mtr.

Design :

- Excellent self-priming ability
- Graded Castings
- No Foot Valve required at the suction line.
- Oil lubricated Mechanical seal with in built oil reservoir.
- Easy maintenance – Back-Pull-Out principle
- Dynamically balanced rotating parts ensure minimum vibrations

Application :

Where liquid is to be lifted from the under ground tanks
Transfer of Non-clear liquids like Dirty/polluted/sewage/
muddy/waste water.

Ideal for Effluent/sludge handling, Dewatering docks, ports,
vessels, swamps, basements, tranches, construction sites,
pools etc.

Pumping petroleum products like L.D.O., Diesel, Petrol,
Kerosene etc.

Transfer of Dirty water of restaurants, Hotels, Resorts etc.

SELF-PRIMING NON CLOG PUMP

STANDARD MOC AVAILABLE IN DIFFERENT TYPE

ITEM NAME	TYPE A	TYPE B	TYPE C	TYPE D	TYPE E	TYPE F	TYPE G	TYPE H	TYPE I	TYPE J	TYPE K	TYPE L	TYPE M	TYPE N
Pump Housing	CI	CF8M	CF8	CS	CI	CI	CI	CF3M	CI	CI	CF7M	CS	CI	CI
Suction Cover	CI	CF8M	CF8	CS	CI	CI	CI	CF3M	CI	CI	CF7M	CS	CI	CI
Window Cover	CI	CF8M	CF8	CS	CI	CI	CI	CF3M	CI	CI	CF7M	CS	CI	CI
Impeller	CI	CF8M	CF8	CS	CF8M	CF8M	CF8M	CF3M	CF8M	CF8M	CF7M	CF8M	CF8	CF8
Intermediate Plate	CI	CF8M	CF8	CS	CI	CI	CI	CF3M	CF8M	CF8M	CF7M	CS	CI	CF8
Adapter	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI
Shaft	EN 8	SS 316	SS 304	EN 8	SS 316	SS 316	EN 8	SS 316L	SS 316	SS 316	Alloy 20	SS 316	SS 304	SS 304
Mechanica Seal (Stationary/Rotary/Elatomer)	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR	Carbon/Ceramic/NBR
Flap Valve	NBR	NBR	NBR	NBR	NBR	NBR	NBR	NBR	NBR	NBR	NBR	NBR	NBR	NBR
Electric Motor Body*	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI	CI

* Not wetted component

MATERIAL GRADES

CI	Cast Iron (IS 210 FG 260)	Alu.	Aluminium
CF8	ASTM A 351 Gr.SS 304	EN 8	EN-8 (BS 970)
CF8M	ASTM A 351 Gr.SS 316	SS 304	ASTM A 276 Gr. 304
CS	ASTM A 216 Gr. WCB	SS 316	ASTM A 276 Gr. 316
CF3M	ASTM A 351 Gr. SS 316L	SS 316L	ASTM A 276 Gr. 316L
CF7M	ASTM A 351 Gr. Alloy 20	SS 410	ASTM A 276 Gr. 410
MS	Mild Steel	Alloy 20	ASTM A 276 Gr. Alloy 20
NBR	Nitrile Butadyne Rubber	HT	High Tension
		CAF	Compressed Asbestos Fibre

NOTE 1 : Other material combinations are available on request

PERFORMANCE TABLE

Model	M3/Hr.→	3	6	9	12	15	18	24	30	36	45	60	75	Size	mm	HP
3-110	Head in Mtr. Bkw NPSH R	15.2 0.43 0.6	13.7 0.55 1.5	11.5 0.63 2.8	9.9 0.68 4.3									1 1/4"	7.5	1
4-110	Head in Mtr. Bkw NPSH R	16.3 0.68 0.6	15.2 0.71 1.0	14.2 0.75 1.3	13.0 0.79 1.9	11.6 0.84 2.9	10.0 0.9 4.8							1 1/2"	12	1.5
5-120b	Head in Mtr. Bkw NPSH R	20.0 1.18 1.2	19.0 1.12 1.3	17.8 1.16 1.4	16.5 1.21 1.6	15.4 1.29 2.1	14.0 1.36 2.8	10.2 1.49 5.0						2"	10	2
5-120	Head in Mtr. Bkw NPSH R		19.8 1.10 1.2	18.9 1.17 1.3	18.0 1.22 1.6	17.1 1.29 2.1	16.1 1.36 2.8	13.7 1.56 5.0	10.3 1.73 7.3					2"	13	3
3-160	Head in Mtr. Bkw NPSH R	32.0 1.25 0.4	28.5 1.41 1.0	24.3 1.56 2.0	19.2 1.73 4.3	10.0 1.8 8.0								1 1/4"	6	3
6-120	Head in Mtr. Bkw NPSH R				19.2 1.58 0.9	18.5 1.60 1.0	18.0 1.66 1.1	16.7 1.79 1.5	15.5 1.97 1.9	14.4 2.15 2.7	12.0 2.45 4.4	4.0 2.65 9.2		2 1/2"	20	5
6-150	Head in Mtr. Bkw NPSH R				29.0 2.85 1.5	28.0 2.95 2.0	27.0 3.05 2.2	25.0 3.25 2.7	23.0 3.5 3.4	20.8 3.7 4.4	16.0 3.95 6.3			2 1/2"	11	7.5
6-160	Head in Mtr. Bkw NPSH R				35.0 3.55 2.5	34.5 3.7 2.5	34.0 3.2 2.6	34.4 4.25 3.0	31.0 4.6 3.8	29.0 4.95 5.4	22.5 5.3 7.0			2 1/2"	12	7.5
8-140	Head in Mtr. Bkw NPSH R					22.5 2.7 1.7	22.0 2.8 1.7	21.0 3.0 1.7	20.5 3.2 1.8	19.8 3.4 2	18.5 3.6 2.6	15 3.8 4.4	10.2 3.8 7.5	80mm	24	7.5



STEG PUMPS INDIA INC.

H.O. : 108, New Cloth Market, Outside Raipur Gate, Ahmedabad- 380 002.

Works : A/37, Shiv Shakti Industrial Estate, Near Choksi Tube, Phase-I, GIDC, Vatva, Ahmedabad-382 445

Tele/fax (H.O.) : +91-79-22161353

Tele/fax (Works) : +91-79-25891218 / 25892813

E-mail : sales@stegpumps.com
info@stegpumps.com

Website : www.stegpumps.com